



1. Construction and dimensions

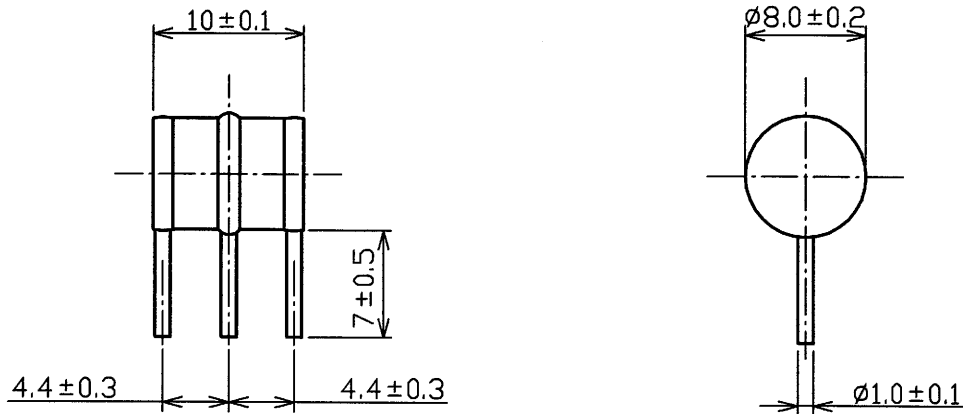

※Surface of Lead Wire : Tin plating

2. Marking

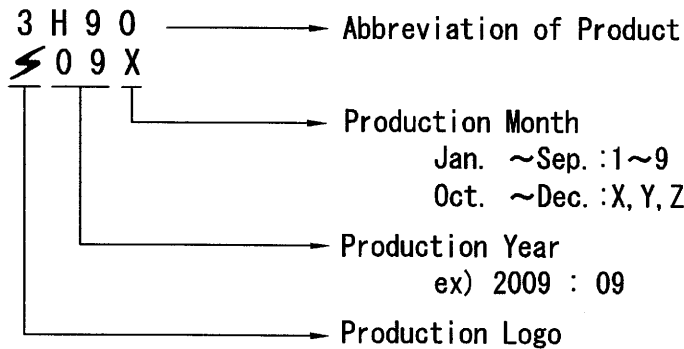

3. Electrical Characteristics

1. DC Spark-over Voltage	100V/s	$90V \pm 20\%$
2. Impulse Spark-over Voltage	$1kV/\mu s$	$\leq 500V$
3. Insulation Resistance	50V DC	$\geq 10,000\Omega$
4. Capacitance	1MHz	$\leq 3.0pF$
5. DC Holdover Voltage	*DC52V ITU-T K. 12	$\leq 150ms$
6. Impulse Life	10/1000 μs , 100A $\times 2$	300times
7. Impulse Discharge Current	8/20 μs 5kA $\times 2$	+5, -5times
8. AC Discharge Current	50Hz 1sec, 5A $\times 2$	10times

After Test of Item 6 and 7 and 8

1) DC Spark-over Voltage	100V/s	65~120V
2) Impulse Spark-over Voltage	$1kV/\mu s$	$\leq 600V$
3) Insulation Resistance	50V DC	$\geq 100M\Omega$

*Test circuit shall comply with ITU-T K.12/Fig.5 and added R4,C2.

DSN	S. E. D	Oct. 30. '09	UNIT	mm		TITLE CERAMIC ARRESTER 3H-90J1
DWG	S. Doi	Oct. 30. '09	SCALE	2/1		DWG No.
CHK	Y. Umano	Oct. 30. '09			REV	