



1. Construction and dimensions

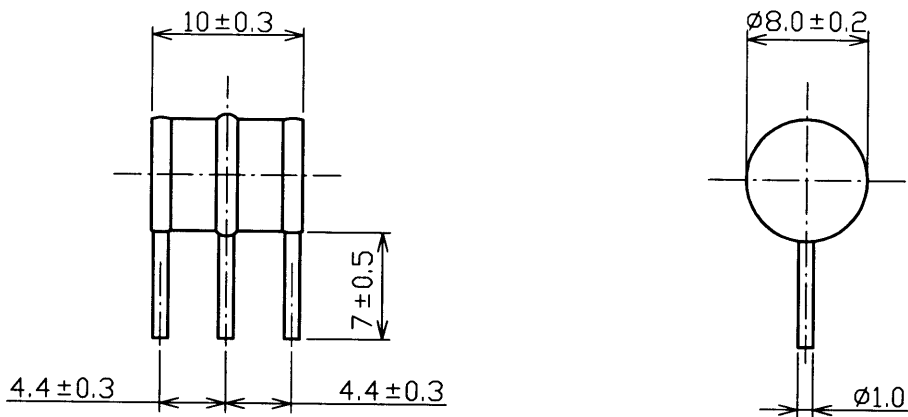

※Surface of Lead Wire : Tin plating

2. Marking

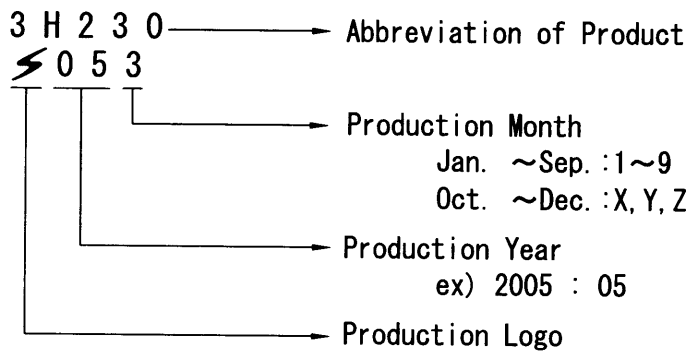

3. Electrical Characteristics

1. DC Spark-over Voltage	100V/s	230V±20%
2. Impulse Spark-over Voltage	1kV/μs	≦700V
3. Insulation Resistance	100V DC	≧10,000MΩ
4. Capacitance	1MHz	≧3.0pF
5. DC Holdover Voltage	*DC135V ITU-T K. 12	≧150ms
6. Impulse Life	10/1000μs, 100A×2	300times
7. Impulse Discharge Current	8/20μs 5kA×2	+5, -5times
8. AC Discharge Current	50Hz 1sec, 5A×2	10times

After Test of Item 6 and 7 and 8

1) DC Spark-over Voltage	100V/s	170~300V
2) Impulse Spark-over Voltage	1kV/μs	≧800V
3) Insulation Resistance	100V DC	≧100MΩ

*Test circuit shall comply with ITU-T K. 12/Fig. 5 and added R4, C2.

DSN	S.E.D	Mar. 24. '05	UNIT	mm		TITLE	CERAMIC ARRESTER
DWG	M. Omata	Mar. 24 '05	SCALE	2/1			3H-230J1
CHK	Y. Umano	Mar. 24 '05				DWG No.	T-041750C01
						REV	