



1. Construction and dimensions

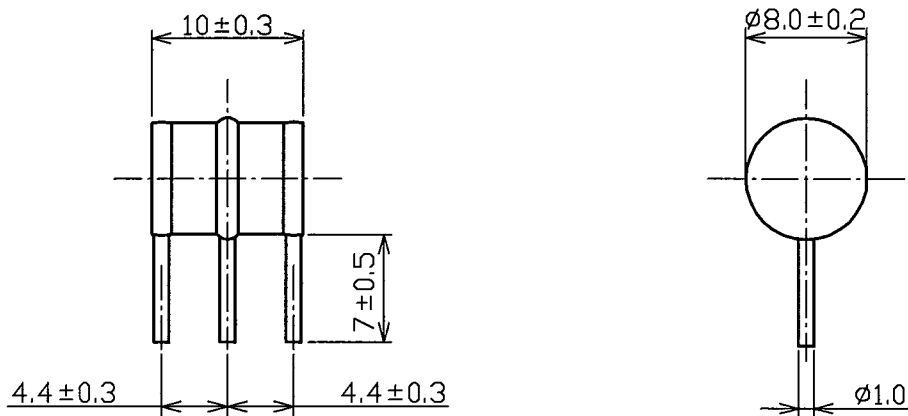

※Surface of Lead Wire : Tin plating

2. Marking

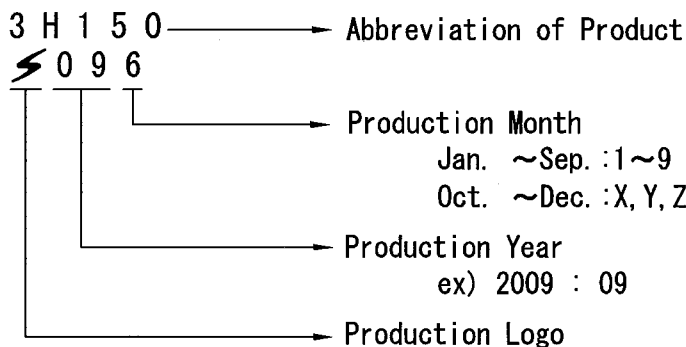

3. Electrical Characteristics

1. DC Spark-over Voltage	100V/s	150V ± 20%
2. Impulse Spark-over Voltage	1kV/μs	≤ 600V
3. Insulation Resistance	50V DC	≥ 10,000MΩ
4. Capacitance	1MHz	≤ 3.0pF
5. DC Holdover Voltage	*DC52V ITU-T K. 12	≥ 150ms
6. Impulse Life	10/1000 μs, 100A × 2	300times
7. Impulse Discharge Current	8/20 μs 5kA × 2	+5, -5times
8. AC Discharge Current	50Hz 1sec, 5A × 2	5times

After Test of Item 6 and 7 and 8

1) DC Spark-over Voltage	100V/s	110 ~ 195V
2) Impulse Spark-over Voltage	1kV/μs	≤ 700V
3) Insulation Resistance	50V DC	≥ 100MΩ

\*Test circuit shall comply with ITU-T K. 12/ Fig. 5 and added R4, C2.

DSN	S.E.D	Jun. 04. '09	UNIT	mm		TITLE	CERAMIC ARRESTER
DWG	S. Lovi	Jun. 04. '09	SCALE	2/1			3H-150J1
CHK	Z. Uwang	Jun. 04. '09				DWG No.	T-090140C01
						REV	